

IN 1930, WE MANUFACTURED AND INTRODUCED THE FIRST ELECTRIC WATER HEATERS IN INDIA. LATER, WE WERE ALSO THE FIRST TO BRING GAS WATER HEATERS AND IRONS TO INDIA.

ALL THROUGH OUR HISTORY, WE HAVE BROUGHT INNOVATION TO INDIAN HOMES, COMBINED WITH PRICES THAT ARE AFFORDABLE AND SERVICE THAT ARE SECOND TO NONE.

THIS LEGACY CONTINUES TO THIS DAY.

SPHEREHOT'S NEW RANGE OF HOME SOLUTIONS ARE DESIGNED TO IMPRESS. FROM WATER HEATERS AND IRONS TO HAND BLENDERS AND TOASTERS – EACH PRODUCT COMBINES HIGH QUALITY WITH STUNNING LOOKS.

WELCOME TO THE WORLD OF REALLY REALLY HOT.



# HAUTE

1 LTR & 3 LTRS

ELECTRIC INSTANT WATER HEATER

AVAILABLE IN TWO COLOUR VARIANTS: ○ WHITE ● GREY ● BLACK



### FEATURES

- ABS (Rust-Proof)**  
Outer casing is made of superior quality, sturdy, rust-proof ABS plastic.
- FUSIBLE PLUG**  
In the event of other safety devices failing, the fusible plug melts and releases hot water and steam through the drain pipe.
- STEM TYPE THERMOSTAT**  
Switches off automatically when the water reaches pre-set temperatures.
- STEM TYPE CUT-OUT**  
In the event of thermostat failure - the cutout operates.
- SAFETY VALVE**  
Prevents exceeding of pre-set inlet rated pressure by opening the passage for water to flow out through the drain pipe.
- STAINLESS STEEL 304 GRADE TANK**  
Inner body of high-quality stainless steel of 304 grade.
- HEATING ELEMENT**  
Extra heavy heating element for a long, trouble-free life.
- CLASS 1 WITHSTANDABLE PRESSURE**  
Heavy gauge material is suitable for high pressure applications such as pressure pumps and high rise buildings.
- TEMPERATURE SENSITIVE LED INDICATOR**  
Color changing LED that indicates change in temperature of the water.

### TECHNICAL SPECIFICATIONS

MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	POWER (KW)	VOLTAGE / FREQUENCY	RATED PRESSURE	DIMENSIONS (MM) L W H
HAUTE	1	VERTICAL	4.5	230 V/50 Hz AC	8 BAR	295 * 165 * 159
HAUTE	1	VERTICAL	3	230 V/50 Hz AC	8 BAR	295 * 165 * 159
HAUTE	3	VERTICAL	4.5	230 V/50 Hz AC	8 BAR	336 * 206 * 195
HAUTE	3	VERTICAL	3	230 V/50 Hz AC	8 BAR	336 * 206 * 195


\*Available only in Ultra Models.

# RAPIDO

1 LTR & 3 LTRS

ELECTRIC INSTANT WATER HEATER

AVAILABLE IN TWO COLOUR VARIANTS: ○ WHITE ○ IVORY



### FEATURES

- ABS (Rust-Proof)**  
Outer casing is made of superior quality, sturdy, rust-proof ABS plastic.
- CLASS 1 WITHSTANDABLE PRESSURE**  
Heavy gauge material is suitable for high pressure applications such as pressure pumps and high rise buildings.
- FUSIBLE PLUG**  
In the event of other safety devices failing, the fusible plug melts and releases hot water and steam through the drain pipe.
- STAINLESS STEEL 304 GRADE TANK**  
Inner body of high-quality stainless steel of 304 grade.

### TECHNICAL SPECIFICATIONS

MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	POWER (KW)	VOLTAGE / FREQUENCY	RATED PRESSURE	DIMENSIONS (MM) L W H
RAPIDO	1	VERTICAL	3	230 V/50 Hz AC	8 BAR	200 * 170 * 330
RAPIDO	1	VERTICAL	4.5	230 V/50 Hz AC	8 BAR	200 * 170 * 330
RAPIDO	3	VERTICAL	3	230 V/50 Hz AC	8 BAR	235 * 185 * 380
RAPIDO	3	VERTICAL	4.5	230 V/50 Hz AC	8 BAR	235 * 185 * 380


\*Tested for 8 BAR pressure.

# UNO

1 LTR & 3 LTRS

ELECTRIC INSTANT WATER HEATER

AVAILABLE IN TWO COLOUR VARIANTS: ○ WHITE ○ IVORY

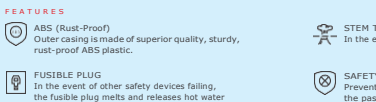

### FEATURES

- ABS (Rust-Proof)**  
Outer casing is made of superior quality, sturdy, rust-proof ABS plastic.
- FUSIBLE PLUG**  
In the event of other safety devices failing, the fusible plug melts and releases hot water and steam through the drain pipe.
- STEM TYPE THERMOSTAT**  
Switches off automatically when the water reaches pre-set temperatures.
- HEATING ELEMENT**  
Extra heavy heating element for a long, trouble-free life.
- STEM TYPE CUT-OUT**  
In the event of thermostat failure - the cutout operates.
- SAFETY VALVE**  
Prevents exceeding of pre-set inlet rated pressure by opening the passage for water to flow out through the drain pipe.
- STAINLESS STEEL 304 GRADE TANK**  
Inner body of high-quality stainless steel of 304 grade.
- CLASS 1 WITHSTANDABLE PRESSURE**  
Heavy gauge material is suitable for high pressure applications such as pressure pumps and high rise buildings.



### TECHNICAL SPECIFICATIONS

MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	POWER (KW)	VOLTAGE / FREQUENCY	RATED PRESSURE	DIMENSIONS (MM) L W H
UNO	1	VERTICAL	3	230 V/50 Hz AC	8 BAR	168 * 165 * 338
UNO	1	VERTICAL	4.5	230 V/50 Hz AC	8 BAR	168 * 165 * 338
UNO	3	VERTICAL	3	230 V/50 Hz AC	8 BAR	215 * 188 * 378
UNO	3	VERTICAL	4.5	230 V/50 Hz AC	8 BAR	215 * 188 * 378


\*Tested for 8 Bar pressure.

# CYLENDRO (PGL) DLX

10, 15, 25 LTRS

ELECTRIC STORAGE WATER HEATER

(GLASS LINED TANK & HIGHLY EFFICIENT HEATING ELEMENT)

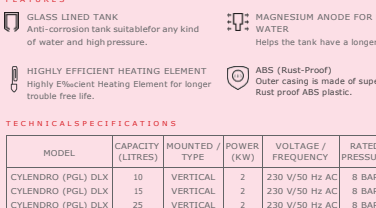

### FEATURES

- GLASS LINED TANK**  
Anti-corrosion tank suitable for any kind of water and high pressure.
- HIGHLY EFFICIENT HEATING ELEMENT**  
Highly Efficient Heating Element for longer trouble free life.
- MAGNESIUM ANODE FOR HARD WATER**  
Helps the tank have a longer life.
- ABS (Rust-Proof)**  
Outer casing is made of superior quality, sturdy, Rust proof ABS plastic.

### TECHNICAL SPECIFICATIONS


MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	POWER (KW)	VOLTAGE / FREQUENCY	RATED PRESSURE	DIMENSIONS (MM) L W H
CYLENDRO (PGL) DLX	10	VERTICAL	2	230 V/50 Hz AC	8 BAR	325 * 325 * 370
CYLENDRO (PGL) DLX	15	VERTICAL	2	230 V/50 Hz AC	8 BAR	325 * 325 * 485
CYLENDRO (PGL) DLX	25	VERTICAL	2	230 V/50 Hz AC	8 BAR	370 * 370 * 585

# CYLENDRO

6, 10, 15, 25, 35, 50, 80, 100 LTRS

ELECTRIC STORAGE WATER HEATER

(GLASS LINED TANK & GLASS LINED HEATING ELEMENT)

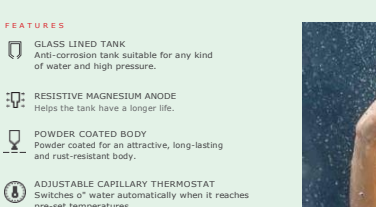

### FEATURES

- GLASS LINED TANK**  
Anti-corrosion tank suitable for any kind of water and high pressure.
- RESISTIVE MAGNESIUM ANODE**  
Helps the tank have a longer life.
- POWDER COATED BODY**  
Powder coated for an attractive, long-lasting and rust-resistant body.
- ADJUSTABLE CAPILLARY THERMOSTAT**  
Switches off water automatically when it reaches pre-set temperatures.
- PUF INSULATION**  
High density PUF insulation for energy saving.
- GLASSLINED HEATING ELEMENT**  
Substantially reduces the scale formation on the element ensuring a highly efficient and long lasting heating element.

### TECHNICAL SPECIFICATIONS

MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	POWER (KW)	VOLTAGE / FREQUENCY	RATED PRESSURE	DIMENSIONS (MM) L W H
CYLENDRO	6	VERTICAL	2	230 V/50 Hz AC	8 BAR	256 397
CYLENDRO	10	VERTICAL	2	230 V/50 Hz AC	8 BAR	256 335
CYLENDRO	15	VERTICAL	2	230 V/50 Hz AC	8 BAR	305 543
CYLENDRO	25	VERTICAL	2	230 V/50 Hz AC	8 BAR	365 586
CYLENDRO	35	VERTICAL	2	230 V/50 Hz AC	8 BAR	350 716
CYLENDRO	50	VERTICAL	2	230 V/50 Hz AC	8 BAR	390 747
CYLENDRO	80	VERTICAL	2	230 V/50 Hz AC	8 BAR	460 740
CYLENDRO	100	VERTICAL	2	230 V/50 Hz AC	8 BAR	460 880
CYLENDRO*	15	HORIZONTAL	2	230 V/50 Hz AC	8 BAR	300 554
CYLENDRO*	25	HORIZONTAL	2	230 V/50 Hz AC	8 BAR	300 784
CYLENDRO*	35	HORIZONTAL	2	230 V/50 Hz AC	8 BAR	350 694
CYLENDRO**	50	HORIZONTAL	2	230 V/50 Hz AC	8 BAR	350 924
CYLENDRO**	80	HORIZONTAL	2	230 V/50 Hz AC	8 BAR	460 810
CYLENDRO**	100	HORIZONTAL	2	230 V/50 Hz AC	8 BAR	460 880

\*Piping type - Left / Right, Floor Mounting \*\*Piping Type - Centre



# NIRVANA

15 LTR & 25 LTRS

ELECTRIC STORAGE WATER HEATER

### FEATURES

- CAPILLARY TYPE THERMOSTAT**  
Switches off automatically when the water reaches pre-set temperature
- POLYMER COATED TANK**  
Anti Corrosion tank suitable for any kind of water and high pressure.
- THERMAL CUT-OUT**  
In the event of Thermostat failure the cutout operates.
- 4 in 1 Multi Function Safety Valve**  
For additional safety against high pressure, steaming and malfunctioning.

### TECHNICAL SPECIFICATIONS

MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	POWER (KW)	VOLTAGE / FREQUENCY	RATED PRESSURE	DIMENSIONS (MM) D H
NIRVANA	15	VERTICAL	2	230 V/50 Hz AC	8 BAR	305 * 470
NIRVANA	25	VERTICAL	2	230 V/50 Hz AC	8 BAR	350 * 560



ION REALLY REALLY

# TURN ON THE HEAT IN AN INSTANT.

## TURBO

6, 10, 15, 25, 35, 50, 70, 100, 140, 200 LTRS  
ELECTRIC STORAGE WATER HEATER

AVAILABLE IN TWO COLOUR VARIANTS:  WHITE  IVORY



### FEATURES

- STAINLESS STEEL 304 GRADE TANK**  
Inner body of high-quality stainless steel of 304 grade.
- POWDER COATED BODY**  
Powder Coated for an attractive long lasting and rust-resistant body
- STEM TYPE CUT-OUT**  
In the event of thermostat failure, the cutout operates.
- PRESSURE RELIEF VALVE\*\***  
Safety device designed to relieve pressure from water heater in case of extreme pressure rise.
- 4-IN-1 MULTI FUNCTION VALVE\***  
For additional safety against high pressure, steaming and malfunctioning.
- STEM TYPE THERMOSTAT**  
Switches off automatically when the water reaches pre-set temperatures.

### TECHNICAL SPECIFICATIONS

MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	POWER (KW)	VOLTAGE / FREQUENCY	RATED PRESSURE	DIMENSIONS (MM)
TURBO	6	VERTICAL / HORIZONTAL	2 / 3	230 V/50 Hz AC	6.5 BAR	241 430
TURBO	10	VERTICAL / HORIZONTAL	2 / 3	230 V/50 Hz AC	6.5 BAR	267 487
TURBO	15	VERTICAL / HORIZONTAL	2 / 3	230 V/50 Hz AC	6.5 BAR	305 491
TURBO	25	VERTICAL / HORIZONTAL	2	230 V/50 Hz AC	6.5 BAR	356 550
TURBO	35	VERTICAL / HORIZONTAL	2	230 V/50 Hz AC	6.5 BAR	356 610
TURBO	50	VERTICAL / HORIZONTAL	3	230 V/50 Hz AC	6.5 BAR	419 705
TURBO	70	VERTICAL / HORIZONTAL	3	230 V/50 Hz AC	6.5 BAR	440 710
TURBO	100	VERTICAL / HORIZONTAL	3	230 V/50 Hz AC	6.5 BAR	425 965
TURBO	140	VERTICAL / HORIZONTAL	3	230 V/50 Hz AC	6.5 BAR	440 1055
TURBO	200	VERTICAL / HORIZONTAL	3	230 V/50 Hz AC	6.5 BAR	530 1400

\*Not available in 6 Litre model. \*\*Only available in 6 Litre model.

## OVLANO

6, 10, 15, 25 LTRS  
ELECTRIC STORAGE WATER HEATER  
(GLASS LINED TANK)

### FEATURES

- SPHEREHOT ABC WITH SILVER ION TECHNOLOGY**  
Anti-bacterial and anti-corrosive tank suitable for any kind of water and high pressure.
- ABS (Rust-Proof)**  
Outer casing is made of superior quality, sturdy and rust-proof ABS plastic.
- ADJUSTABLE CAPILLARY THERMOSTAT**  
Switches off water automatically when the temperature reaches pre-set temperatures.
- CAPILLARY THERMAL CUT-OUT**  
In the event of Thermostat failure - cutout operates.
- CLASSIC WHIRLFLOW 2**  
Provides faster heating and maximum energy saving with 10% more hot water.
- MAGNESIUM ANODE FOR HARD WATER**  
Helps the tank have a longer life.

### TECHNICAL SPECIFICATIONS

MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	POWER (KW)	VOLTAGE / FREQUENCY	RATED PRESSURE	DIMENSIONS (MM)
OVLANO	6	VERTICAL	2	230 V/50 Hz AC	8 BAR	260 * 265 * 372
OVLANO	10	VERTICAL	2	230 V/50 Hz AC	8 BAR	280 * 283 * 432
OVLANO	15	VERTICAL	2	230 V/50 Hz AC	8 BAR	320 * 324 * 460
OVLANO	25	VERTICAL	2	230 V/50 Hz AC	8 BAR	370 * 371 * 550



## LX 6L

6 LTRS  
ELECTRIC STORAGE WATER HEATER

AVAILABLE IN TWO COLOUR VARIANTS:  WHITE  IVORY



### FEATURES

- ABS (Rust-Proof)**  
Outer casing is made of superior quality, sturdy, rust-proof ABS plastic.
- STEM TYPE THERMOSTAT**  
Switches off automatically when the water reaches pre-set temperatures.
- SAFETY VALVE**  
Prevents exceeding of pre-set inlet rated pressure by opening the passage for water to flow out through the drain pipe.
- STAINLESS STEEL 304 GRADE TANK**  
Inner body of high-quality stainless steel of 304 grade.
- STEM TYPE CUT-OUT**  
In the event of thermostat failure, the cutout operates.
- FUSIBLE PLUG**  
In the event of other safety devices failing, the fusible plug melts and releases hot water and steam through the drain pipe.

### TECHNICAL SPECIFICATIONS

MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	POWER (KW)	VOLTAGE / FREQUENCY	RATED PRESSURE	DIMENSIONS (MM)
LX 6L	6	VERTICAL	3	230 V/50 Hz AC	6.5 BAR	240 * 240 * 380

## REVERA

6, 8, 10, 16 LTRS  
GAS INSTANT WATER HEATER



### FEATURES

- DOUBLE SOLENOID VALVE\***  
For best-in-class safety.
- 99.9% PURE ELECTROLYTIC COPPER**  
Heat exchanger to maximize heat efficiency in the water heater.
- FULLY AUTOMATIC**  
Hot water starts to flow when tap is turned on and stops when turned off.
- OXYGEN DEPLETION SENSOR**  
In case of oxygen depletion in the area, it will automatically cut off the gas supply.
- FLAME FAILURE DEVICE**  
Automatically cuts off the gas supply if the flame goes out.
- CHILD SAFETY SWITCH**  
Additional safety measure for under-age children.

### TECHNICAL SPECIFICATIONS

MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	WATER PRESSURE	WATER HEAD	HEAT OUTPUT	DIMENSIONS (MM)
REVERA	6	VERTICAL	MIN. 0.25 BAR	MIN. 2.75M	43.2 MJ/H	290 * 125 * 440
REVERA ULTRA	6	VERTICAL	MIN. 0.1BAR	MIN. 0.93M	43.2 MJ/H	290 * 125 * 440
SUMO	6	VERTICAL	MIN. 0.25 BAR	MIN. 2.75M	43.2 MJ/H	290 * 125 * 440
SUMO ULTRA	6	VERTICAL	MIN. 0.1 BAR	MIN. 0.93M	43.2 MJ/H	290 * 125 * 440
TURBO	6	VERTICAL	MIN. 0.25 BAR	MIN. 2.75M	43.2 MJ/H	290 * 125 * 440
TURBO ULTRA	6	VERTICAL	MIN. 0.1 BAR	MIN. 0.93M	43.2 MJ/H	290 * 125 * 440
REVERA	8	VERTICAL	MIN. 0.25 BAR	MIN. 2.75M	57.6 MJ/H	330 * 185 * 520
REVERA	10	VERTICAL	MIN. 0.25 BAR	MIN. 2.75M	72 MJ/H	330 * 185 * 585
REVERA	16	VERTICAL	MIN. 0.25 BAR	MIN. 2.75M	115.2 MJ/H	380 * 180 * 680

\*Available only in Ultra Models.

## REVERA

80, 125, 160, 200, 300 LTRS  
GAS STORAGE WATER HEATER



### FEATURES

- PRESSURE & TEMPERATURE RELEASE VALVE (PTR)**  
Ensures tank safety by release of excess temperature and / or pressure above pre-set rated pressure.
- FULLY AUTOMATIC**  
Hot water starts to flow when tap is turned on and stops when turned off.
- ADJUSTABLE CAPILLARY THERMOSTAT**  
Switches off water automatically when it reaches pre-set temperatures.
- HIGH LIFE EXPECTANCY OF TANK**  
Suitable for hard water, anti-rusting and a high life expectancy.

### TECHNICAL SPECIFICATIONS

MODEL	CAPACITY (LITRES)	MOUNTED / TYPE	GAS CONSUMPTION	DIMENSIONS (MM)
REVERA	80	VERTICAL	1.42 1.07	460 1050
REVERA	125	VERTICAL	1.42 1.07	460 1440
REVERA	160	VERTICAL	1.42 1.07	460 1610
REVERA	200	VERTICAL	1.42 1.07	580 1360
REVERA	300	VERTICAL	1.42 1.07	580 1860

